


VIDEO MODULE LYNX WEB SERVER

This is the instruction manual for PC access to the configuration of the Lynx Video Modules.

For more details about the concepts in this manual see the following manuals:


- LYNX KIT 1L OUTDOOR PANEL– Manual (Cod. 970016)
- DIGITAL LYNX PANEL– Basic Programming Manual (Cod. 970015)
- LYNX SKYLINE OUTDOOR PANELS – Installation Manual (Cod. 970018)

These manuals are included with their corresponding products and are also available at www.fermax.com

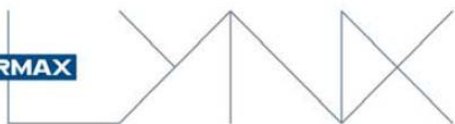


Index

| | |
|---|----|
| Index | 2 |
| Introduction | 5 |
| Access to the Web Server (Standard Lynx mode) | 5 |
| Configuring the computer to allow access to the Lynx web server | 5 |
| Connection | 5 |
| Access | 5 |
| Authentication | 6 |
| Language Selection | 6 |
| Lynx panel configuration via Web Server | 7 |
| Basic setup | 7 |
| Password | 7 |
| Call panel settings | 7 |
| About the panels' IP addresses | 7 |
| Call panel settings (Kit Panels) | 7 |
| Type: | 7 |
| Block: | 8 |
| Unit: | 8 |
| Panel: | 8 |
| Panel tag: | 8 |
| Call panel settings (Pushbutton panels) | 8 |
| Type: | 8 |
| Block: | 8 |
| Panel: | 8 |
| Panel tag: | 9 |
| Button # N: | 9 |
| Call panel settings (Digital panels) | 9 |
| Type: | 9 |
| Block: | 9 |
| Panel: | 9 |
| Panel tag: | 10 |
| Alphanumeric keypad: | 10 |
| Look & Feel | 10 |
| Call settings | 10 |
| Ring tone | 10 |
| Voice Synthesiser | 10 |
| Audio down | 10 |
| Audio up | 10 |
| Retroview | 10 |
| Call Filter | 11 |

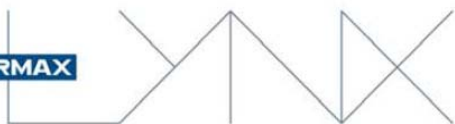

| | |
|---|-----------|
| Filter list | 11 |
| Presentation | 11 |
| Language | 11 |
| Activation | 11 |
| Agenda | 11 |
| Temperature | 11 |
| Date..... | 11 |
| Time | 11 |
| Date format..... | 11 |
| Additional information upon opening | 12 |
| Advanced setup..... | 12 |
| Access Control | 12 |
| Relay tag 1..... | 12 |
| Relay time 1 | 12 |
| External relay 1 | 12 |
| Relay tag 2..... | 12 |
| Relay time 2 | 12 |
| External relay 2 | 12 |
| Door Sensor Time..... | 12 |
| PIN:..... | 12 |
| PIN Length..... | 12 |
| Prox + Pin | 12 |
| Prox. Reader..... | 13 |
| Installer Code | 13 |
| Opening the door with the egress button | 13 |
| Open the door from the apartment..... | 13 |
| Take a picture of each call | 13 |
| Network setup | 13 |
| MAC address | 13 |
| Modo IP..... | 13 |
| IP Address | 14 |
| Subnet mask..... | 14 |
| Default gateway..... | 14 |
| DB Server | 14 |
| NTP Server..... | 14 |
| Audio & Video..... | 14 |
| System management..... | 14 |
| Updating | 14 |
| Configuration | 14 |
| Download..... | 14 |
| Upload..... | 14 |

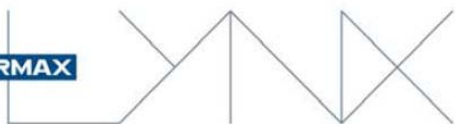

| | |
|---|----|
| Factory settings..... | 15 |
| Ring tones | 15 |
| Voice synthesiser | 15 |
| Logos | 15 |
| Pictures | 15 |
| Restart..... | 15 |
| Checking the IP address on a Lynx Digital panel | 16 |
| Restore to factory settings | 16 |

Introduction

To facilitate the installation and maintenance processes, the Lynx video modules incorporate a web server from which we can configure the panel parameters.

For kit or pushbutton panels, this is the only way to configure the panel, since these panels do not have a display or keypad.

The panel's IP address can be configured by choosing between different modes:

- **Standard Lynx mode** (default selection)
- **DHCP mode.**
- **Static IP mode.**

Access to the Web Server (Standard Lynx mode)

Configuring the computer to allow access to the Lynx web server

To be able to access the Lynx web server, the connected computer must be on the same Lynx network.

In network configurations on your computer, you must select the network card and its TCP/IP protocol properties with the following values:

- IP Address

| | | | | | | |
|----|---|-----|---|-----|---|---|
| 10 | . | 201 | . | 100 | . | 1 |
|----|---|-----|---|-----|---|---|

 (It can be any other type of address like 10.x.x.x which does not conflict with other elements of the installation)
- Subset mask

| | | | | | | |
|-----|---|---|---|---|---|---|
| 255 | . | 0 | . | 0 | . | 0 |
|-----|---|---|---|---|---|---|

ATTENTION: If you are using the same card to connect to the home or work network, note the aforementioned configuration before making any changes. Once you have configured the Lynx panel, you must return to the initial configuration parameters to be able to access your network.

Connection

The connection between the computer and the Lynx installation is done via a standard network cable with RJ-45 connectors.

You can connect the network cable directly from the computer to the video module, or in already installed installations, connect the computer to any free port on any of the installation's switches.

IMPORTANT: The video module must be powered to allow access to the web server.

Access

This Lynx web server is accessed via the computer's web browser, entering the corresponding IP address of the panel to be configured.


The default panel IP addresses:

- Kit Panels

| | | | | | | |
|----|---|-----|---|---|---|---|
| 10 | . | 100 | . | 0 | . | 1 |
|----|---|-----|---|---|---|---|
- Button Panels.

| | | | | | | |
|----|---|-----|---|---|---|---|
| 10 | . | 200 | . | 0 | . | 0 |
|----|---|-----|---|---|---|---|
- DIGITAL Panels:

| | | | | | | |
|----|---|-----|---|-----|---|---|
| 10 | . | 200 | . | 100 | . | 0 |
|----|---|-----|---|-----|---|---|

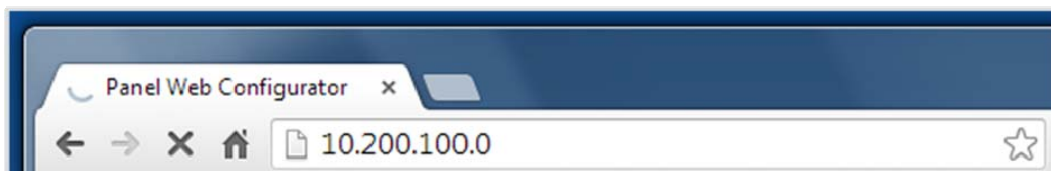

Enter the IP address of the video module on the browser's address bar


Authentication

A username and password are required to access the web server.


The default values are:

- Username: **admin**
- Password: **admin**

These values can be changed on the panel's configuration options.

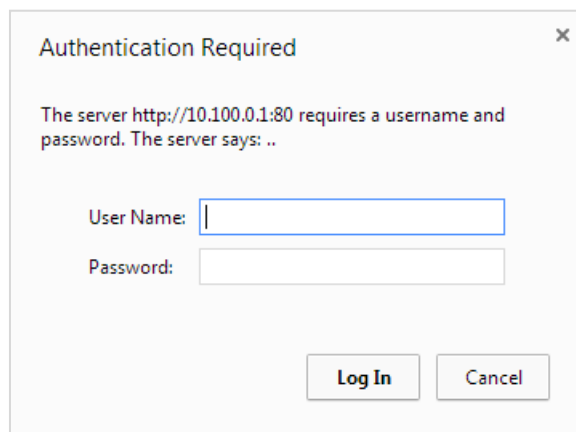

Web server homepage in English (default option).

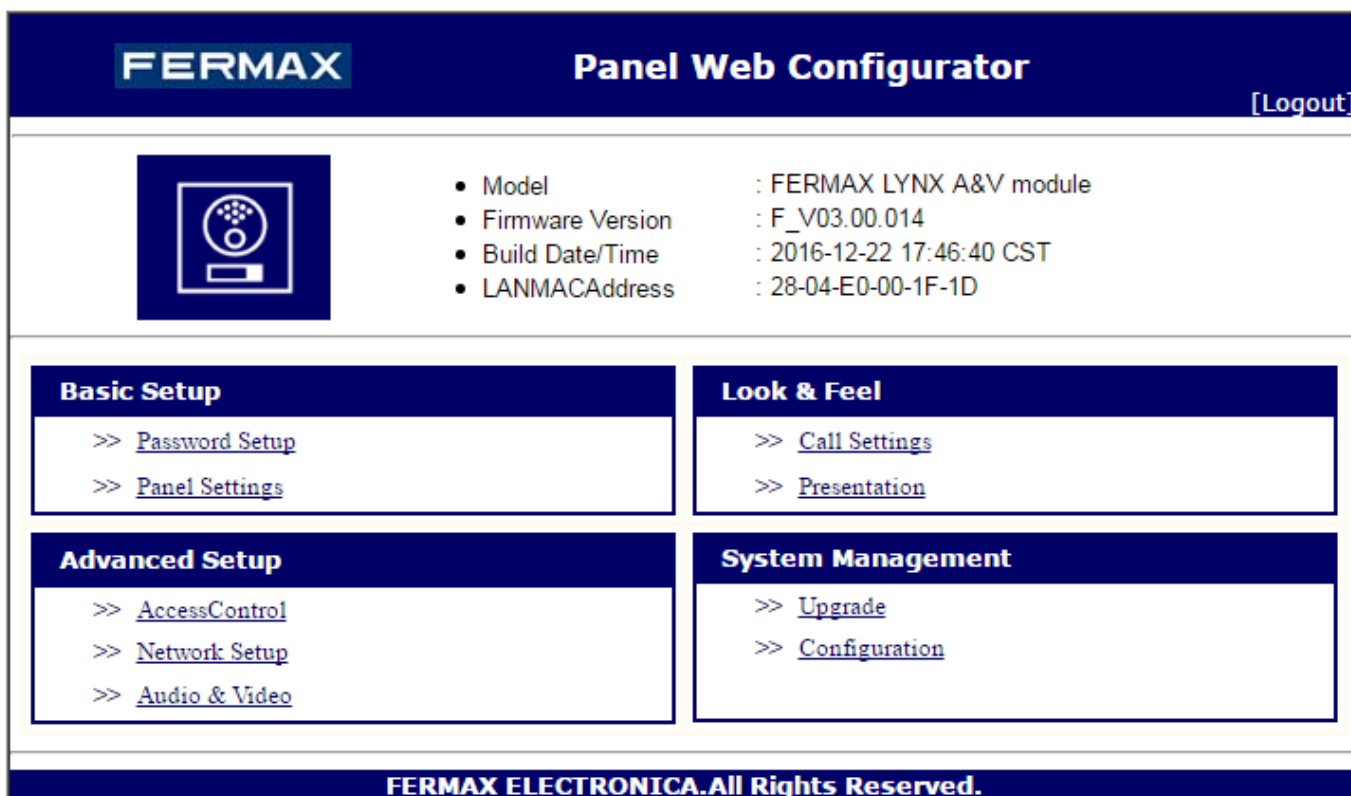


Language Selection

The web server is by default in English.

To change the language go to **Look & Feel**>>**Presentation**>>**Language** and select the desired language in the dropdown options.

To save the selected options you must click **Save** on the lower right corner of the screen. The browser will display a confirmation message for changing the settings.

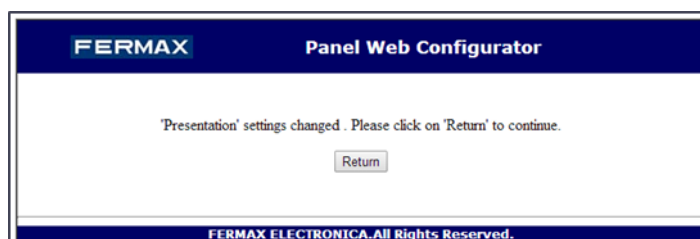

Lynx panel configuration via Web Server

The Lynx video module can detect the type of panel installed by the connected modules. Relative to the modules it determines if it is a Kit, Pushbutton or Digital panel.

The available configuration options vary depending on the type of panel.

Basic setup

Password

This allows you to change the user name and password to access the web server.

Once changed, the server asks for the new information to access it.

It's important to remember this access data. If they have changed and you do not have them, the only way to access is by **resetting to the factory values**.

Call panel settings

All Lynx panels use the same video module. This module detects the connected devices and relative to this configures the panel type:

- **Kit Panels** The video module incorporates a pushbutton and does not have a display or button modules connected.
- **Button Panels**. The video module has one or various button modules connected.
- **Digital Panels**. The video module has a Lynx module connected.

The configuration options are logically different for each type of panel.

About the panels' IP addresses

In a Lynx installation all devices connected to the network have an IP address. This address must be unique in order to avoid communication conflicts.

On the Lynx panels the IP address is automatically assigned relative to the following parameters (Standard Lynx mode):

- Panel type
- Block number
- Panel number

Any change made in any of these parameters will modify the panel's IP address.

It is important that you note the address of the panel to access it later on.

Call panel settings (Kit Panels)

Default IP address: 10.100.0.1 / (Block: 0 – Panel: 0 – Unit: 1)

Type:

Panel type.

Options:

- Villa Panel
- Emergency panel

The villa panels call the apartment configured in the Unit section, while the emergency panels call the guard unit.

Block:

Block number the panel belongs to.

Options:

- Between 00 and 99 (default option 00)

Unit:

Apartment number with which the panel communicates with.

Options:

- Between 1 and 8190

This option is not available if the panel type has been configured as Emergency panel.

Panel:

Panel Number

Options:

- Between 0 and 7 (default option 0)

Panel tag:

Access descriptive name (Optional). This name will appear on the monitors and the guard units when called from this panel.

Call panel settings (Pushbutton panels)

Default IP address: 10.200.0.0 / (Block: 0 – Panel: 0)

Type:

Panel type.

Options:

- General entrance
- Block entrance

Block:


Block number the panel belongs to.

Options (As block entrance):

- Between 00 and 99 (default option 00)
- Pushbuttons: programming 4 digits indicating Unit (apartment): [0001-8190]

Options (As general entrance):

- Pushbuttons: programming 6 digits indicating **Block + Unit**: [000001- 998190]
- The complete installation
Configured this way, the panel can communicate with all of the installation blocks:
- Various blocks
A new configuration option appears in which you can select the blocks with which the panel can communicate.
 - Available blocks:
Select the block or blocks with which the panel can communicate.



Panel:

Panel Number

Options:

- Between 00 and 99 (default option 00)

Panel tag:

Access descriptive name (Optional). This name will appear on the monitors and the guard units when called from this panel.

Button # N:

A push button panel may have up to 128 buttons. On this panel all of the buttons connected to the Lynx module appear

Button # N: Apartment:

Select the apartment number to call for each of the push buttons. The value must be between 1 and 8190.

Configure the pushbuttons to call the different PMUs (guard units)

In a PUSHBUTTON panel you can configure the pushbuttons to call the different PMU (guard units). The pushbuttons are programmed using 5 digits. Depending on your configuration, a pushbutton can call a PMU as General Entrance, a PMU as a range of Various Blocks or a PMU as a Block Entrance.

Opciones:

- General entrance: 100XX, where XX = PMU number [10000, 10099]
- Various blocks: 200XX, where XX = PMU number [20000, 20099]
- Block entrance: YYYXX, donde
 - YYY = Block number [000XX, 099XX]
 - XX = PMU number [00000, 09999]

Call panel settings (Digital panels)

Default IP address: 10.200.100.0 / (General entrance – Panel: 0)

Type:

Panel type.

Options:

- General entrance
- Block entrance

Block:

Block number the panel belongs to.

Options (As block entrance):

- Between 00 and 99 (default option 00)

Options (As general entrance):

- The complete installation
Configured this way, the panel can communicate with all of the installation blocks:
- Various blocks
A new configuration option appears in which you can select the blocks with which the panel can communicate.
 - Available blocks:
Select the block or blocks with which the panel can communicate.

Panel:

Panel Number.

Options:

- Between 00 and 99 (default option 0)

Panel tag:

Access descriptive name (Optional). This name will appear on the monitors and the guard units when called from this panel.

Alphanumeric keypad:

If this option is enabled, it allows for entering the letters of the alphabet, via the successive pressing of the corresponding numerical key, with the following relations:

| KEY | KEYPRESS | | | | |
|-----|----------|-----|-----|-----|-----|
| | 1st | 2nd | 3rd | 4th | 5th |
| 1 | 1 | | | | |
| 2 | 2 | A | B | C | |
| 3 | 3 | D | E | F | |
| 4 | 4 | G | H | I | |
| 5 | 5 | J | K | L | |
| 6 | 6 | M | N | O | |
| 7 | 7 | P | Q | R | S |
| 8 | 8 | T | U | V | |
| 9 | 9 | W | X | Y | Z |
| 0 | 0 | | | | |
| A | | | | | |
| B | | | | | |

Look & Feel

Call settings

Ring tone

Select the desired ring tone to call from a panel amongst the options in the drop-down menu.

The module has 5 available predefined ring tones and the option for another 5 user ring tones. The user ring tones can be loaded by going to **System management -> Configuration -> Ring tones**

Voice Synthesiser

Panel volume adjustment for the "Door open" message... and the keypad touch control.

Select the desired value between 0 (disabled) and 7 via a sliding bar.

Audio down

Adjust the volume on the panel

Select the desired value between 0 and 7 via a sliding bar.

**Audio up**

Adjust the volume to the apartment.

Select the desired value between 0 and 7 via a sliding bar.

Retroview

Adjust the viewing mode of the camera's image on the display.

Options:

- Deactivated -> No image is displayed
- Until answered -> The image is displayed until the call is answered
- Always -> The image is displayed until the call is completed

Call Filter

With this option you can activate a restriction on the users' list so that only the selected users from this list appear on the display.

Filter list

With this option you can create a filtered address list. This option is only if the Call Filter function has been selected.

To add houses to the list, write the apartment number in the text box and then press the **Add** button. The list box displays the list of apartments whose data will appear on the display.

To delete apartments from the list, select the apartment number to be deleted and then press the **Delete** button.

To save press the **Save** button.

Presentation

Language

Select the desired language for the drop-down options.

Activation

This allows for the selection of the module's activation mode. The LYNX display has a presence sensor that automatically detects if a person is in front of the panel.

Options:

- Pressed key or movement sensor
- Pressed Key
- Always active

Agenda

With this option we can indicate if when searching to make a call, the data from only 1 user is presented on the screen or 4 users at a time, one over the other.

Options:

- 1 name on the screen
- 4 names on the screen

If you select 4 names per screen, only the corresponding name field appears, while if you select 1 name per screen a second line of additional data is displayed, if they are enabled. If not, the apartment's number is displayed.

The users' names in the agenda are in alphabetical order.

Temperature

Not available function

Date

Set the date in the selected format

Time


Set the time in the format hh:mm

Date format

To select the date format to adapt it to your country's format

Options:

- Day / Month / Year
- Month / Day / Year
- Year / Month / Day

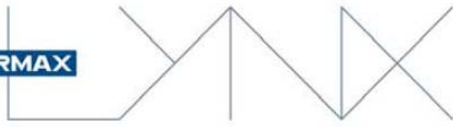

Additional information upon opening

With this option we can enable that in the Lynx display certain information is shown when the open doors is activated. This information is managed from the guard unit and may be additional information for the visitor, such as the lift to take or where to go.

Advanced setup

Access Control

Relay tag 1

Relay 1 descriptive name (Optional). This name will appear on the monitors and the guard units.

Relay time 1

Time in seconds that relay 1 on the amplifier is active.

Options:

- Between 00 (disable) and 99 seconds

External relay 1

This allows you to enter the address of a relay belonging to a Lynx relay decoder and that activates when relay 1 of the Lynx module is activated.

Options:

- Block xxx-xxx-xxx-xxx

Relay tag 2

Relay 2 descriptive name (Optional). This name will appear on the monitors and the guard units.

Relay time 2

Time in seconds that relay 2 on the amplifier is active.

Options:

- Between 00 (disable) and 99 seconds

External relay 2

This allows you to enter the address of a relay belonging to a Lynx relay decoder and that activates when relay 2 of the Lynx module is activated.

Options:

- Block xxx-xxx-xxx-xxx

Door Sensor Time

Time in seconds that allows for the door to remain open before generating an alarm.

Options:

- Between 00 (disabled) and 99 seconds

PIN:

Enables the access via a pin code on the keypad.

PIN Length

Configuration of the length of the access PIN Code.

Options:

- Between 4 and 6 digits

Prox + Pin

Upon activating this option the user must enter the PIN after being identified with the proximity card.

Prox. Reader

This allows for the selection of the type of communication from the access reader connected to the module.

Options:

- Wiegand -26
- Wiegand -32
- Wiegand -44
- Data/Clock

Installer Code

This allows you to change the installer code to access the panel's configuration.

The default installer Code is **19025**.

Opening the door with the egress button

This enables the activation of relay 1 on the module from the button connected to the 'BS' and 'GND' terminals.

Open the door from the apartment.

Enable the activation of relays 1 and 2 from the module from the apartments.

Take a picture of each call

By enabling this function you can take a picture of each call made from the panel, even if communication is not established.

The picture is saved in the guard unit of the ADMIN server.

Network setup


MAC address

This shows the module's Mac address. This address is unique and does not vary with any of the panel's configuration parameter.

Modo IP

The panel's IP address can be configured by choosing between different modes:

- a) **Standard Lynx mode** (default selection).
- b) **DHCP mode**.
- c) **Static IP mode**.



- a) **Standard Lynx mode / c) Static IP mode**

If the network mode selected is LYNX or static, the panel will verify if the IP address and destination's configuration are available. If any of them is not available, the panel will not change its configuration. If the changes make a change in IP, the web server will display this new IP address.

- b) **DHCP mode**

If the DHCP mode is selected, the panel will verify if the configuration destination is available. If so, the panel will save the data and wait for a DHCP server. If there is not DHCP server, the panel will change its configuration to the standard Lynx address.

ATTENTION: when the IP address is changed due to the DHCP mode, we do not know the IP of the panel. It is possible to find out the panel's IP through the PMU (conciierge).

IP Address

This shows the module's IP address. This address varies relative to the panel's configuration.

ATTENTION: Since the only way of accessing the module's web server is via the IP address and keeping in mind that this address changes when programming the values for panel type, block number, etc. It is important that you note the IP address of the module to access it later on.

Subnet mask

This displays the subnet mask

Default gateway

This displays the gateway's default IP address.

DB Server

This displays the DB server's IP address.

NTP Server

This displays the NTP server's IP address.

Audio & Video

This section is only informative.

It displays information on the RTP port and the audio codecs used.

System management

Updating

Firmware version.

This displays the module's firmware version. You can update the firmware by selecting a valid update file in ZIP format. Once you have selected the file, press the Upgrade button.

The firmware's update does not change the module's configuration data.

Configuration

Download

Save the current module configuration in a file. This file is saved with the name **config.xml** in the directory configured for this in your browser.

The configuration file is encrypted and can not be changed with an editor.

IMPORTANT NOTE:

When updating a panel in an installation with a firmware version greater than the rest, it updates the firmware version automatically in all installation panels.

Upload

This allows you to upload the configuration from a previously saved file.



Factory settings

This resets the module to its default values.

ATTENTION: Resetting to factory settings is done automatically and without a button asking for confirmation. **All of the user's configuration is lost.**

Ring tones

The module has 5 available predefined ring tones and the option for another 5 user ring tones. With this option you can upload personalised user ring tones.

To upload a ring tone select it from a dropdown menu (from 1 to 5) where you can upload the ring tone and by pressing the select file button you access the selection menu where you can choose the desired file. To confirm press the upload button.

Keep in mind:

- The system allows ring tones in WAV or MP3 format
- MP3 files should not contain metadata
- The ring tone duration is limited to 20 seconds.

Selection of the ring tone from the call panel is done at **Look & Feel -> Call settings-> Call -> Ring tone**, where the predefined and user's ring tones appear.

Voice synthesiser

This allows you to select a personalised audio file for each of the languages of the voice synthesiser module.

In order to load a personalised message, select the corresponding language from the drop down menu. By pressing the button to select a file, you access the selection menu where we can choose the desired file. To confirm press the load button.

Keep in mind:

- The file format for the message files must be WAV @ 8Kbps and with a 5 second duration

Logos

This allows you to select a personalised image file for each of the status logos on the Lynx display.

Upon selecting the drop-down position, the current image is displayed in the lower window. By pressing the button to select a file, you access the selection menu where we can choose the desired file. To confirm press the load button.

Keep in mind:

- The logo file format must be a PNG with a resolution of 100 x 100 pixels

Pictures

This allows you to select a personalised image file for each of the screens on the Lynx display.

Upon selecting the position from the drop-down menu (1-5), the current image is displayed in the lower window. By pressing the button to select a file, you access the selection menu where you can choose the desired file. To confirm press the load button.

Keep in mind:

- The image file format must be a PNG with a QVGA resolution of 320 x 240 pixels

Restart

This restarts the Lynx module. This restart is the same as removing the power and repowering the module.

Checking the IP address on a Lynx Digital panel

On the Lynx digital panels you can check its IP address from the configuration menu.

- Press “A” + “AB21AB” + “19025”
- The **Configuration Menu** appears
- Select option **6** and the **panel’s current IP address is displayed**

Restore to factory settings

If you can not access a panel because you do not know the user name or password or its IP address, the only way to access is by **resetting to the factory settings**.

This operation is carried out by electrically modifying the equipment, with the aim of restricting anyone without physical access to the equipment from modifying it in any way.

Steps:

1. Disconnect the system's power supply.
2. Short the Video Module's "BS" and "-" terminals.
3. Reconnect the system's power supply and maintain the short-circuit until you hear a "beep."
4. After that sound you can remove the "BS" and "-" terminal's short.
5. After completing these steps, the panel has restored the settings to its factory settings.